


APPLICATIONS: Wide drawers and trays, bulk storage bins or pullout shelving units in wood and metal cabinets or cases.

Heavy-Duty Slide Full Extension Up to 275-lb. [124 kg.] Load Capacity**

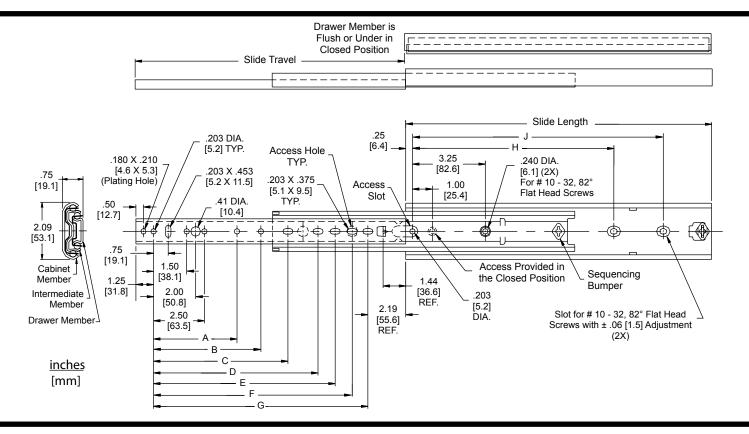

Finish Bright electro-zinc (C) plating

Lengths 12" to 28" [305mm to 711mm]

Height 2.09" [53.1mm]

Load Capacity Moderate use: Up to 275 lbs. [124 kg]**

Frequent use: Up to 200 lbs. [91 kg]*

Sidespace .75" + .030/ - .000 [19.1mm + .76/ - .00]

Travel Full Travel

Mounting Side mount only

Hardware Drawer: # 10 - 32 X .50" with #8

slotted pan head

Cabinet: # 10-32, 82° flat head screw

Movement Steel ball bearings

Features Hold-in detent

Part Number	Slide Length	Slide Travel	Α	В	С	D	E	F	G	н	J
C3600-12	12.00 [305]	12.00 [305]				6.05 [154.0]	7.06 [179.4]	7.81 [198.4]	8.56 [217.5]	8.25 [209.6]	10.50 [266.7]
C3600-14	14.00 [356]	14.00 [356]				8.06 [204.8]	9.06 [230.2]	9.81 [249.2]	10.56 [268.3]	10.25 [260.4]	12.50 [317.5]
C360016	16.00 [406]	16.00 [406]	5.00 [127.0]			10.06 [255.6]	11.06 [281.0]	11.81 [300.0]	12.56 [319.1]	12.25 [311.2]	14.50 [368.3]
C3600-18	18.00 [457]	18.00 [457]	5.00 [127.0]		9.56 [242.9]	12.06 [306.4]	13.06 [331.8]	13.81 [350.8	14.56 [369.9]	14.25 [362.0]	16.50 [419.1]
C3600-20	20.00	20.00	5.00	7.50	11.56	14.06	15.06	15.81	16.56	16.25	18.50
	[508]	[508]	[127.0]	[190.5]	[293.7]	[357.2]	[382.6]	[401.6]	[420.7]	[412.8]	[469.9]
C3600-22	22.00	22.00	5.00	7.50	13.56	16.06	17.06	17.81	18.56	18.25	20.50
	[559]	[559]	[127.0]	[190.5]	[344.5]	[408.0]	[433.4]	[452.4]	[471.5]	[463.6]	[520.7]
C3600-24	24.00	24.00	5.00	7.50	15.56	18.06	19.06	19.81	20.56	20.25	22.50
	[610]	[610]	[127.0]	[190.5]	[395.3]	[458.8]	[484.2]	[503.2]	[522.3]	[514.4]	[571.5]
C3600-26	26.00	26.00	5.00	7.50	17.56	20.06	21.06	21.81	22.56	22.25	24.50
	[660]	[660]	[127.0]	[190.5]	[446.1]	[509.6]	[535.0	[554.0]	[573.1]	[565.2]	[622.3]
C3600-28	28.00	28.00	5.00	7.50	19.56	22.06	23.06	23.81	24.56	24.25	26.50
	[711]	[711]	[127.0]	[190.5]	[496.9]	[560.4]	[585.8]	[604.8]	[523.9]	[616.0]	[673.1]

^{**}Load rating based on a side mount testing criteria for model 3640A: a pair of 18" slides on a 42" wide drawer, cycled 75,00 times.

Installation Instructions

- To ensure proper operation of the slides, make certain that all mounting screws are inserted so that the screw heads are inside the slides. (No washers on the inside of the slides.)
- 2. With slides fully extended, install slide outer members (largest) into cabinet using # 10 32, 82° flat head screws. See Figure 1. Be sure slides are parallel.
- Mount drawer to extended slide inner members (smallest) using # 10 - 32 X .50" with #8 slotted pan head screws. See Figure 2. Leave all screws loose for final adjustment.
- 4. Adjust slide position until movement is smooth. Tighten all screws and if necessary use more to secure slides and complete installation.

Slide Ordering Instructions

Complete your slide order for model 3600 by specifying the following:

Total Slides Required

Slide Finish

Slide Model

Slide Length

Optional Polybag Packaging

Includes mounting screws

Optional Screw Hardware Kit

Kit contains screws to mount one pair of slides. Kit included with D-Pack. Kit ordered separately for bulk.

#10 - 32 X .50" with #8 Slotted Pan Head Screw #10 - 32 X .50" with #8 Slotted Pan Head Screw

"J" - 3.25" [82.5] Pilot Holes

Figure 1

3.50" *

[88.9]

Packaging

Distributor (D) Pack: All lengths are packaged 5 pairs per box. Polybag includes one pair of slides packed with screws.

Bulk (P) Pack: Lengths 12"-20" 7 pair per box Lengths 22"-28" 5 pair per box

Order screw hardware kit separately. (P/N 4180-0235-XE)

Specifications

Slide members: Cold rolled steel Ball retainers: Cold rolled steel Ball bearings: Carburized steel

RoHs Compliant

Note: Specifications, materials, prices, terms, and delivery are subject to change without notice.



ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue Santa Fe Springs, CA 90670

TEL (562) 903-0200 FAX (562) 903-0208 www.accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China

Copyright © 2018-2024 Accuride International Inc. 3700-9291(9076)-MK029-R6-0424