




**Applications:** This slide is ideal for very heavy duty applications in environments subject to corrosion.

## MODEL C4170

Zinc plated mild steel  
Full Extension  
Up to 2150. [980 kg] Load Rating  
Slides Sold Individually

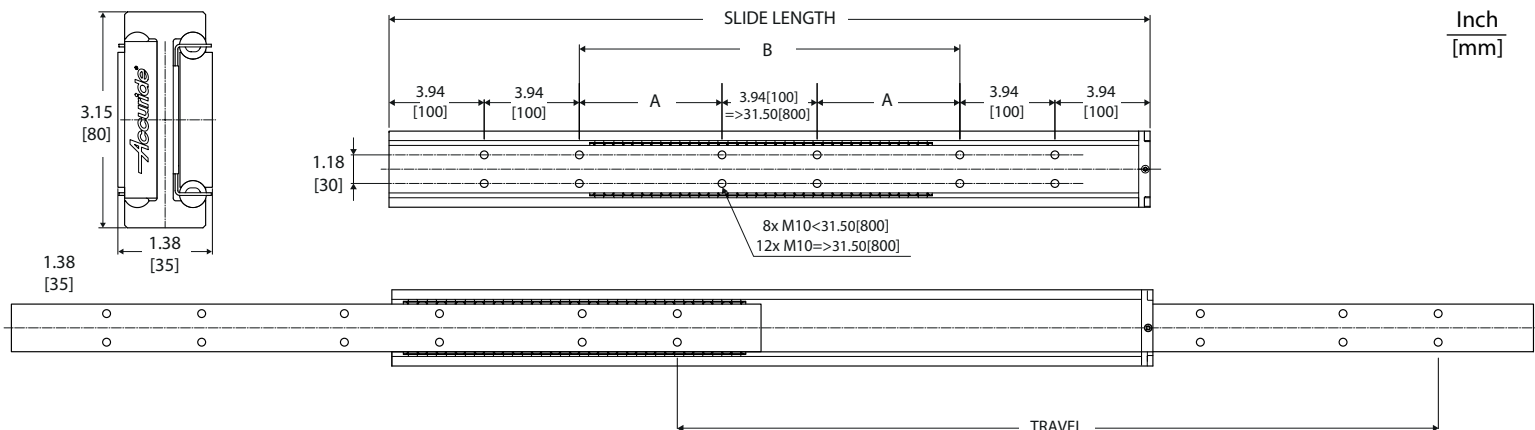

|          | Inch[mm]     |             |           |            | Lbs.[kg]     |              |
|----------|--------------|-------------|-----------|------------|--------------|--------------|
|          | Slide Length | Travel      | A         | B          | Weight       | Load Rating  |
| C4170-20 | 19.69[500]   | 19.69[500]  | —         | 3.94[100]  | 18.30[8.30]  | 2050.30[930] |
| C4170-24 | 23.62[600]   | 23.62[600]  | —         | 7.87[200]  | 21.96[9.96]  | 2094.39[950] |
| C4170-28 | 27.56[700]   | 27.56[700]  | —         | 11.81[300] | 25.64[11.63] | 2116.44[960] |
| C4170-32 | 31.50[800]   | 31.50[800]  | 5.90[150] | —          | 29.30[13.29] | 2160.53[980] |
| C4170-36 | 35.43[900]   | 35.43[900]  | 7.87[200] | —          | 32.96[14.95] | 2028.25[920] |
| C4170-40 | 39.37[1000]  | 39.37[1000] | 9.84[250] | —          | 36.64[16.62] | 1962.11[890] |

**Finish:** Zinc plated mild steel  
Stainless steel balls & retainer

**Lengths:** Available from 20" to 40"  
in 4" increments  
(Contact us for additional lengths)

**Travel:** Full Extension

**Height:** 3.15" [80mm]

**Load Rating:** 2150lb [980kg] per pair

**Side Space:** 1.38" [35mm]

**Mounting:** Side mount


**Hardware:** M10: Max screw length 12mm


**Temperature:** -4°F to 230°F (-20°C to +110°C)

**Testing:** 220 hours salt spray test

**NOTE:** Flat mounting is not recommended as it reduces the load rating by 81%

**NOTE:** I-beam intermediate member for extra strength

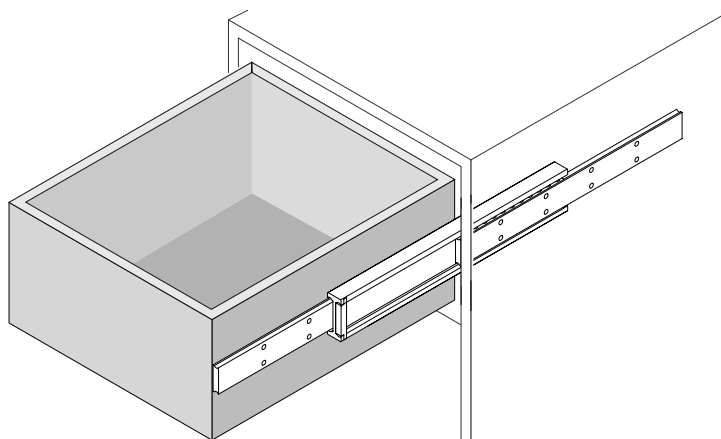

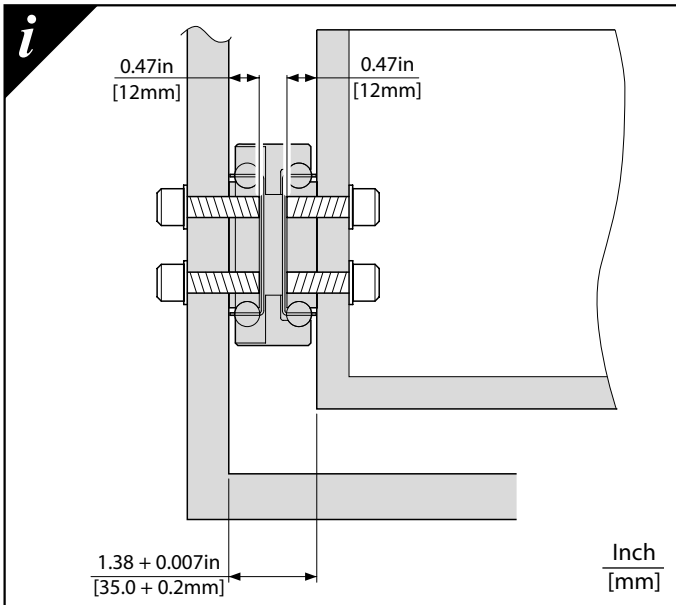

- All fixing positions must be used to achieve maximum load rating. The screw must meet a bolt strength of at least 8.8.
- The slide must be loaded centrally.
- For drawers with a width of more than 2 meters apart, please contact Accuride.

## Slide Ordering Instructions

Complete your slide order for model C4170 by specifying the following information:

Total Slides Required 1 Slide

Slide Finish C

Slide Model 4170

Slide Length -20

(Fasteners are **not** included)

**NOTE:** Slides sold individually.

## Specifications

Slide Members: Zinc plated Mild Steel  
 Ball Retainers: Stainless Steel  
 Ball Bearings: Stainless Steel  
 Aluminum finish is RoHS compliant

**NOTE:** Specifications, materials, prices, terms, and delivery are subject to change without notice.

## Packaging

**Bulk Pack:** All Lengths are packaged one slide per box. Packaging includes one slide and a technical sheet.  
**Fasteners are not included.**

**NOTE:** We recommend that quality grease, rated for extreme pressure is re-applied at 2,000 cycle intervals.

# Accuride®

Accuride International Inc.

12311 Shoemaker Avenue  
 Santa Fe Springs, CA 90670  
 TEL (562) 903-0200  
 FAX (562) 903-0208

Manufacturing, Engineering, and Sales  
 United States • Germany • Japan •  
 Mexico • United Kingdom • China

For the most current technical information visit [www.accuride.com](http://www.accuride.com)

**⚠ WARNING:** This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

