



Slides sold individually



Part Number	Slide Length	Travel	A	B	Weight	Load Rating
SS4170-20	19.69[500]	19.69[500]	-	11.81[300]	18.30[8.30]	1730.63[785]
SS4170-22	21.65[550]	21.65[550]	-	13.78[350]	20.06[9.10]	1741.65[790]
SS4170-24	23.62[600]	23.62[600]	-	15.75[400]	22.05[10.00]	1763.70[800]
SS4170-26	25.59[650]	25.59[650]	-	17.72[450]	23.81[10.80]	1774.72[805]
SS4170-28	27.56[700]	27.56[700]	-	19.68[500]	25.57[11.60]	1785.74[810]
SS4170-30	29.53[750]	29.53[750]	-	21.65[550]	27.56[12.50]	1796.77[815]
SS4170-32	31.50[800]	31.50[800]	5.90[150]	-	29.32[13.30]	1818.81[825]
SS4170-34	33.46[850]	33.46[850]	6.89[175]	-	31.09[14.10]	1763.70[800]
SS4170-36	35.43[900]	35.43[900]	7.87[200]	-	33.07[15.00]	1708.58[775]
SS4170-38	37.40[950]	37.40[950]	8.86[225]	-	34.83[15.80]	1675.51[760]
SS4170-40	39.37[1000]	39.37[1000]	9.84[250]	-	36.60[16.60]	1642.44[745]
SS4170-42	41.34[1050]	41.34[1050]	10.83[275]	-	38.36[17.40]	1609.37[730]
SS4170-44	43.31[1100]	43.31[1100]	11.81[300]	-	40.34[18.30]	1565.28[710]
SS4170-46	45.28[1150]	45.28[1150]	12.80[325]	-	42.11[19.10]	1521.19[690]
SS4170-48	47.24[1200]	47.24[1200]	13.78[350]	-	43.87[19.90]	1477.10[670]

CORROSION RESISTANT: 500 hours salt spray test

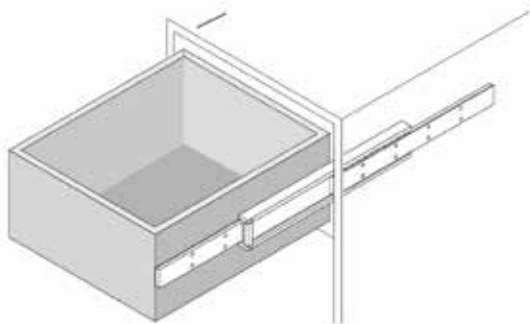

***Note:** Flat mounting is not recommended, reduces the load rating by 80%

1. All mounting positions must be used to achieve the maximum load capacity. Use an M10 screw with a minimum strength rating of Grade 8.8.
2. For optimal performance the slide must be loaded in the center.
3. For drawers wider than 118 inches, please contact Accuride.

Slide Ordering Instructions

Complete your slide order for model SS4170 by specifying the following information:

	1 Slide	SS	4170	-20
Total slides required	_____	_____	_____	_____
Slide finish	_____			
Slide model	_____			
Slide length	_____			

Note: Slides sold individually, fasteners are not included.

Specifications

Slide members: Stainless steel

Ball retainers: Stainless steel

Ball bearings: Stainless steel

Material: Stainless steel

Note: Specification, materials, prices, terms and delivery are subject to change without notice.

Packaging

Bulk Pack: All lengths are packaged one slide per box. Packaging includes one slide and a technical sheet.
Fasteners are not included.


NOTE: We recommend reapplying high-quality grease, rated for extreme pressure, at 2,000-cycle intervals.

Accuride®

Accuride International Inc.
 12311 Shoemaker Avenue
 Santa Fe Springs, CA 90670
 Tel (888) 491-7112
 FAX (562) 903-0208

Manufacturing, Engineering and Sales
 United States • Germany • Japan •
 Mexico • United Kingdom • China

For the most technical information visit www accuride.com

 **WARNING:** This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov