




Applications: This slide is ideal for industrial and mobile applications requiring high load capacity in a compact slide profile.

MODEL C4150

Zinc-plated carbon steel
Full extension
Up to 1,300. [622 kg] Load rating
Slides sold individually

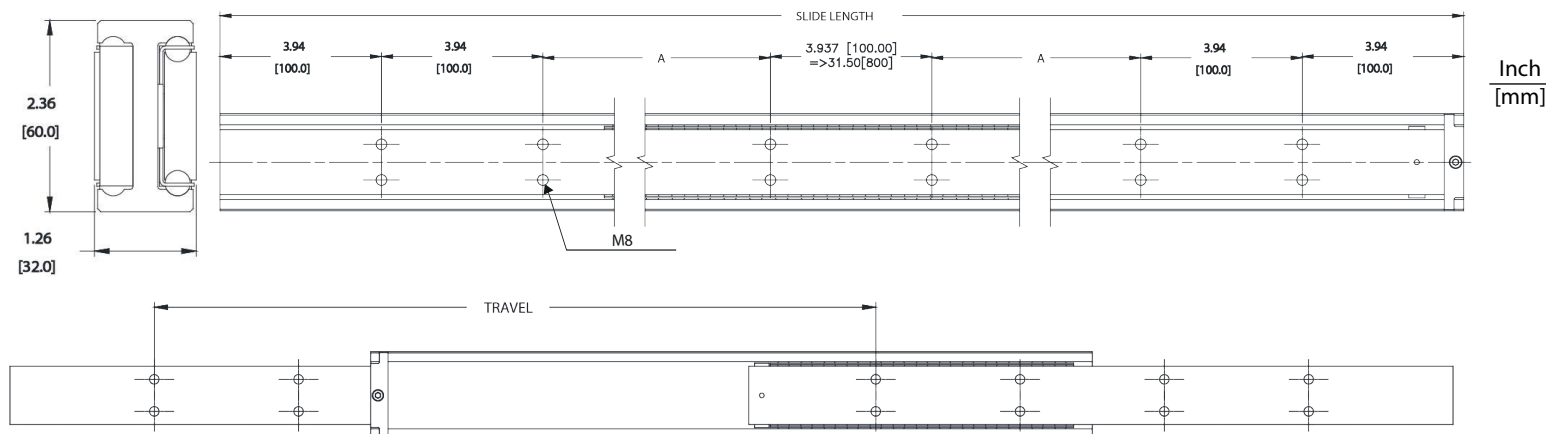

	Inch [mm]			Lbs [Kg]	
PART NUMBER	SLIDE LENGTH	TRAVEL	A	WEIGHT	LOAD RATING
C 4150-20	19.69[500]	19.69[500]	—	13.22[6]	1016[461]
C 4150-24	23.62[600]	23.62[600]	—	15.87[7.2]	1135[515]
C 4150-28	27.56[700]	27.56[700]	—	18.51[8.4]	1252[568]
C 4150-32	31.50[800]	31.50[800]	5.90[150]	21.16[9.6]	1371[622]
C 4150-36	35.43[900]	35.43[900]	7.87[200]	24.03[10.9]	1265[574]
C 4150-40	39.37[1000]	39.37[1000]	9.84[250]	26.67[12.1]	1161[527]
C 4150-44	43.30[1100]	43.30[1100]	11.81[300]	29.32[13.3]	1056[479]
C 4150-48	47.24[1200]	47.24[1200]	13.77[350]	31.96[14.5]	950[431]
C 4150-52	51.18[1300]	51.18[1300]	5.90[150]	34.61[15.7]	844[383]
C 4150-56	55.11[1400]	55.11[1400]	6.88[175]	37.25[16.9]	740[336]
C 4150-60	59.05[1500]	59.05[1500]	7.87[200]	39.90[18.1]	502[228]
C 4150-63	62.99[1600]	62.99[1600]	8.85[225]	42.54[19.3]	529[240]

Finish: Zinc-plated carbon steel
Stainless steel balls & retainer

Lengths: Available from 20" to 63"
(Contact us for additional lengths)

Travel: Full Extension

Height: 2.36" [60 mm]

Load Rating: Up to 1,300 lb [622 kg]

Side Space: 1.25" [32 mm]

Mounting: Side mount


Flat Mount: Reduces load rating by 80%

Hardware: M8: Max screw length 10 mm


Temperature: -20°C to +110°C

Corrosion Resistance: 220-hour salt spray test

NOTE: Max Deflection: 1% at rated load

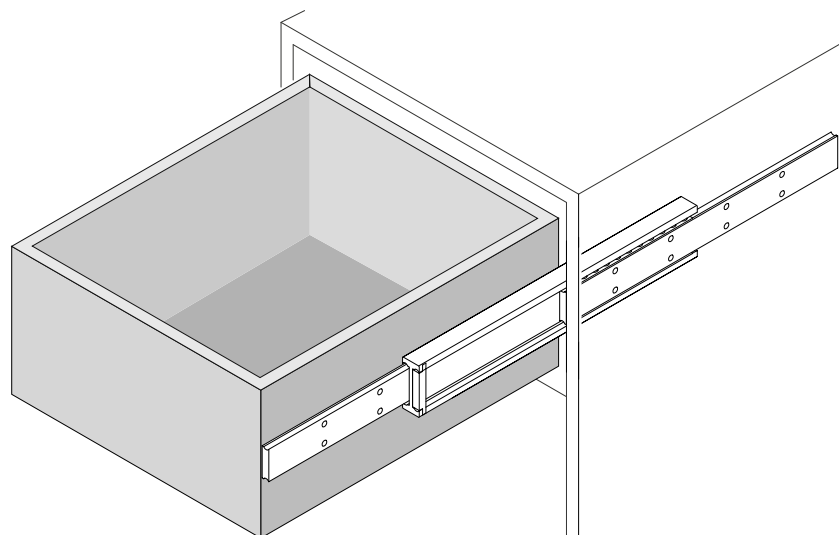

Installation Instructions

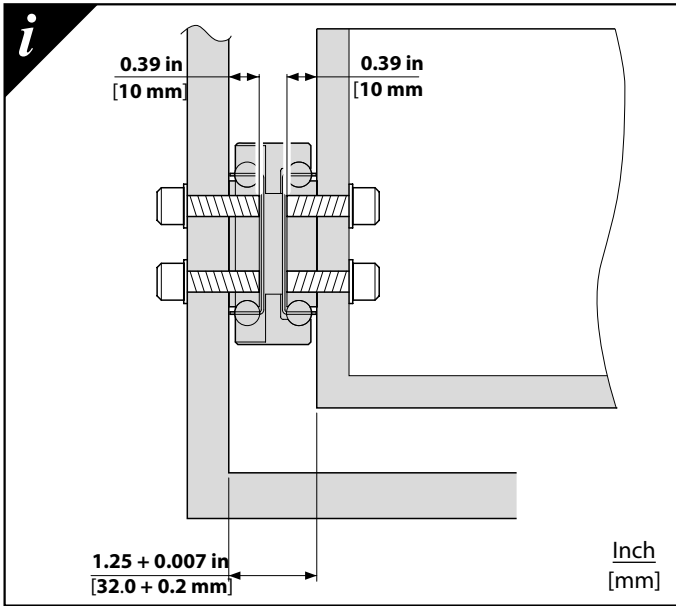

- All fixing positions must be used to achieve maximum load rating. The screw must meet a bolt strength of at least 8.8.
- The slide must be loaded centrally.
- For drawers with a width of more than 2 meters apart, please contact Accuride.

Slide Ordering Instructions

Complete your slide order for model C4150 by specifying the following information:

Total Slides 1 Slide Required C 4150 -20
Slide Finish _____
Slide Model _____
Slide Length _____
(Fasteners are **not** included)

NOTE: Slides sold individually.

Specifications

Slide Members: Zinc-plated carbon steel
Ball Retainers: Stainless steel
Ball Bearings: Stainless steel
RoHS Compliant

NOTE: Specifications, materials, prices, terms, and delivery are subject to change without notice.

Packaging

Bulk Pack: All lengths are packaged one slide per box. Packaging includes one slide and a technical sheet.
Fasteners are not included.

NOTE: We recommend that quality grease, rated for extreme pressure, is re-applied at 2,000 cycle intervals.

Accuride®

Accuride International Inc.

12311 Shoemaker Avenue
Santa Fe Springs, CA 90670
TEL (888) 491-7112

Manufacturing, Engineering, and Sales
United States • Germany • Japan •
Mexico • United Kingdom • China

For the most current technical information visit www.accuride.com

⚠ **WARNING:** This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.